


KC-258 Double Head Welding Machine

WELDING MACHINES > KC-258

- Movable head is moved to the desired position manually and fixed by pneumatic brakes.
- Welds both colored and white profiles with 0,2 mm welding seam restriction.
- Fixed left head allows welding at variable angles between 60° - 180°.
- Strongly welds two corners of PVC profiles with single operation.
- All operations are controlled by the digital touchscreen display.
- Long lasting heating plates distribute heat homogenously.
- Practical welding fixture changing system.
- Long lasting Teflon usage and easy change.
- Manually movable right head welds 90°
- Ability to clean the heater plates easily.

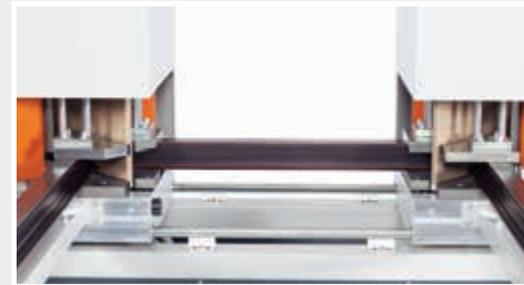

OPTIONAL

KC-258 /20 (Heritage)

- Double Head Welding Machine Heritage (one side)

KC-258 /40 (Timberweld)

- Double Head Welding Machine Heritage (double sides)

Technical Features :

• Power Supply: 400 V, 3 ~ 50-60 Hz	• Air Consumption: 100 l/min.
• Total Power Output: 3 kW	• Machine Height: 1640 mm
• Max. Welding Length : 3400 mm	• Machine Length: 3950 mm
• Min. Welding Length: 425 mm	• Machine Width: 760 mm (+1000 mm profile support arms)
• Max. Profile Width: 130 mm (for 90. Welding)	• Machine Weight: 500 kg
• Max. Profile Height: 190 mm	
• Min. Profile Height: 38 mm	
• Air Pressure: 6-8 bar	

