


KD-662 Four Head Welding Machine (Double Stack)

WELDING MACHINES > KD-662

- Long lasting Teflon usage and easy change by special Teflon system between 0°C - 55°C without the need for a fan.
- PC controlled (PID) heat control system to sustain strong welding results in compliance with international standards.
- At automatic production mode, works according to the data obtained from window-door production software.
- Specially designed long lasting heating plates distributes heat homogenously without being affected
- Heating temperature, melting and welding times can be adjusted individually for every profile type.
- High performance industrial PC with Windows 10 Embedded operating systems and working
- Pre-heated welding knives provide better welding results at cold weather conditions.
- Welds four corners of PVC profiles simultaneously at 90° with high accuracy.
- Able to welding two frame at the same time and same dimension.
- 1.2 mm. welding seam restriction from weather conditions.
- 19" Led monitor.

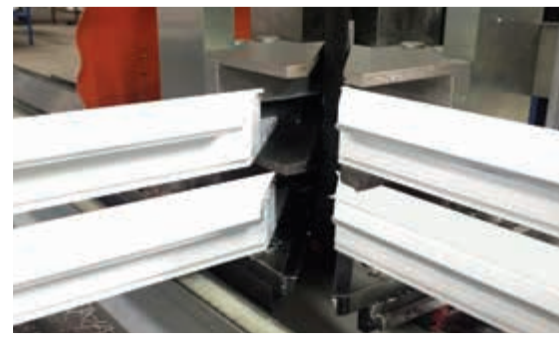

Technical Features :

• Power Supply: 400 V, 3 ~ 50-60 Hz	• Air Consumption: 80 l/min.
• Total Power Output : 11.75 kW, 30.9 A	• Machine Height: 1780 mm
• Max. Welding Length: 3000 mm x 2585 mm	• Machine Length: 4600 mm
• Min. Welding Length: 420 mm x 420 mm	• Machine Width: 4500 mm
• Max. Profile Height: 180 mm	• Machine Weight: 1850 kg
• Min Profile Height: 30 mm	
• Max. Profile Width: 120 mm	
• Air Pressure: 6-8 bar	