


KC-258

Double Head Welding Machine

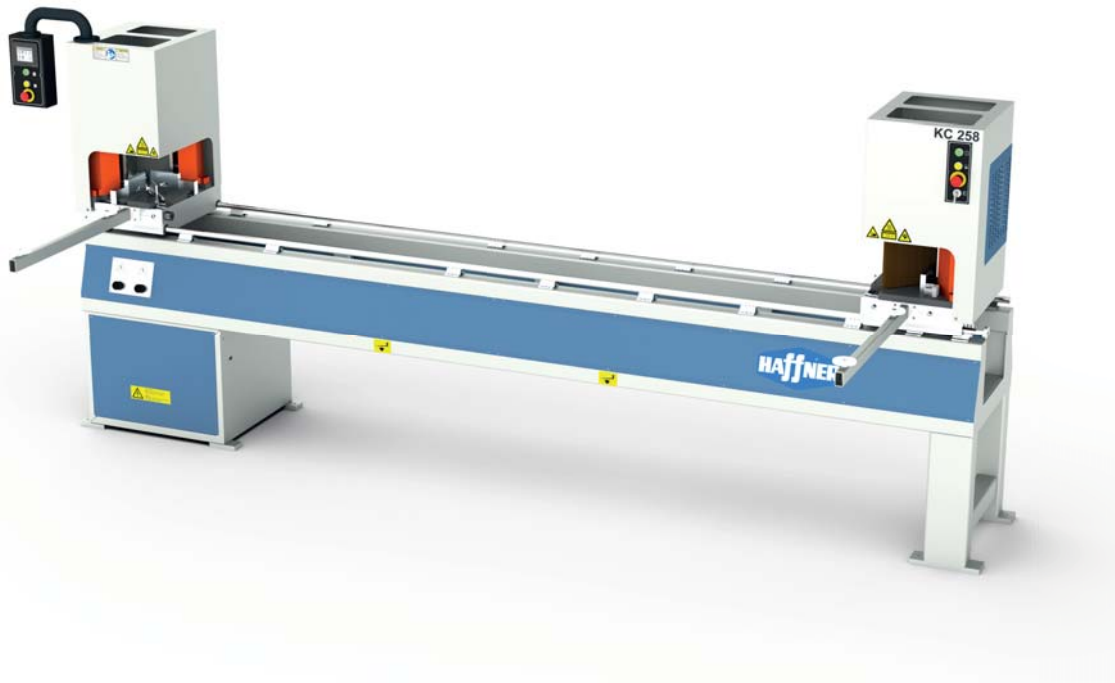

Technical Features

- Power Supply: 400 V, 3~50-60 Hz
- Total Power Output: 3 kW
- Air Pressure: 6-8 bar
- Air Consumption: 100 l/min.
- Max. Welding Length: 3.000 mm x 2.585 mm
- Min. Welding Length: 420 mm x 420 mm
- Max. Profile Height: 180 mm
- Min. Profile Height: 30 mm
- Max. Profile Width: 120 mm
- Machine Height: 1780 mm
- Machine Weight: 2300 kg

- Movable head is moved to the desired position manually and fixed by pneumatic brakes.
- Welds both colored and white profiles with 0,2 mm welding seam restriction.
- Fixed left head allows welding at variable angles between 60° - 180°.
- Strongly welds two corners of PVC profiles with single operation.
- All operations are controlled by the digital touchscreen display.
- Long lasting heating plates distribute heat homogenously.
- Practical welding fixture changing system.
- Long lasting teflon usage and easy change.
- Manually movable right head welds 90°.
- Ability to clean the heater plates easily.

OPTIONAL

KC-258 (Heritage)

- Double head welding machine heritage. (Double sides)

