




TT-352 Double Mitre Saw (Ø:350mm)

SAWS » TT-352

- PVC profiles cutting with 350 mm saw blade diameter.
- The movable head can be manually positioned at the desired length by controlling the digital display and pneumatically fixed.
- Standard equipped with digital measuring system.
- Pivoting range from 45° to 90° left and right provide to work both internal and external dimensions. The pivoting range can be infinitely adjusted and fixed by manual clamping
- Vertical pneumatic clamps ensure optimum profile fixing.
- Location points at $\pm 60^{\circ}$, $\pm 67.5^{\circ}$, and $\pm 75^{\circ}$ ease to adjust the head at most common angles.
- The saw blade feed speed can be adjusted.
- Protective covers increase working safety.

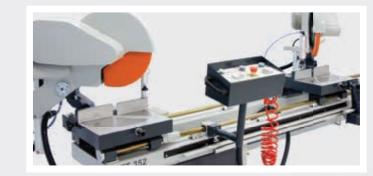



Technical Features:

| Power Supply : 400 V, 3~ 50-60 Hz | Machine Height (incl. Display) : 1750 mm |
|---|--|
| Total Power Output : 2,2 kW | Machine Length: 4500 mm |
| Spindle Speed : 2800 rpm | Machine Width: 1050 mm |
| Max. Cutting Length : 3700 mm | Machine Weight: 425 kg |
| Min. Cuttng Length : 410 mm | |
| Air Pressure : 6-8 bar | |
| Air Consumption : 40 l/min. | |

¹⁵⁰ 100 50 8 8 8 8 8 8 8 8 8 8

^{*} Please see the cutting diagram for the Min. and Max. profile size dimensions.